


## Galvanised Iron Steel In Coil and Sheet G300 or G550 Minimized / Regular or Zero Spangle



### AVAILABLE :

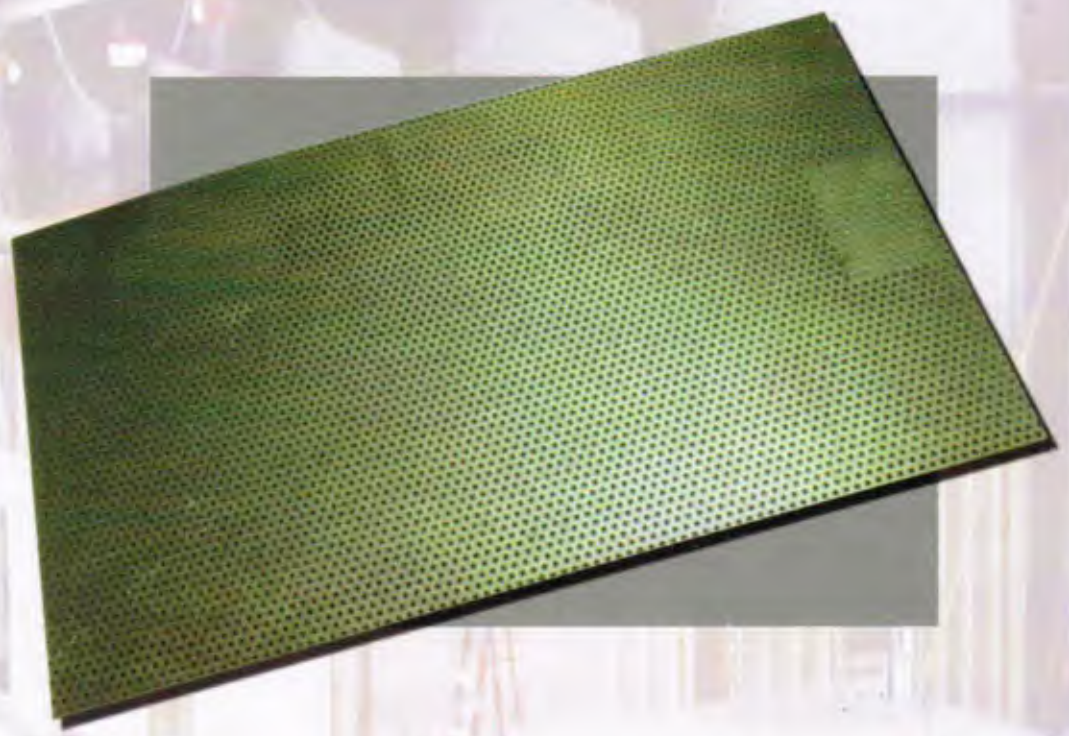

Cut to Size



Slitted Coils

### Application :

- **Minimized Spangle / Regular or Zero Spangle**
  - Office furniture
  - Interior and Exterior of House Construction
  - Materials for Painted Steel
    - Air - Condition Ducting
  - Door Frame & Window Frame, Roof and Steel Truss
  - General Engineering and Industrial Usage
    - Automobile Industries
    - Fencing & wall cladding

### Zinc Coating Weight

Coating Type	Coating Specification (both sides)						Min. Weight (g/m <sup>2</sup> )
	ASTM	BS 2989	DIN 17.162	JIS G 3302	KS D 3506	POSCO	
G 235							720
G 210							640
		G 600	600	Z 60	Z 60	500	600
G 185							560
G 165						500	500
		G 450	450	Z 45	Z 45	450	450
G 140							430
G 115		G 350	350	Z 35	Z 35	350	350
						300	300
G 90		G 275	275	Z 27	Z 27	275	275
				Z 25	Z 25	250	250
				Z 22	Z 22	220	220
		G 200	200	Z 20	Z 20	200	200
G 60				Z 18	Z 18	180	180
						150	150
G 40				Z 12	Z 12	120	120
		G 100	100	Z 10	Z 10	100	100
						090	90
				Z 08	Z 08	080	80
				Z 06	Z 06	060	60

### Tolerance on Thickness

Dimensional tolerances conform with JIS G3302 (1997)

Normal thickness	Width	
	630 and over, up to 1000	1000 and over, up to 1250
Up to 0.25	± 0.04	± 0.04
0.25 and over, up to 0.40	± 0.05	± 0.05
0.40 and over, up to 0.60	± 0.06	± 0.06
0.60 and over, up to 0.80	± 0.07	± 0.07
0.80 and over, up to 1.00	± 0.07	± 0.08
1.00 and over, up to 1.25	± 0.08	± 0.09
1.25 and over, up to 1.60	± 0.10	± 0.11

\*\*Size Available 914mm and 1219mm, other width required is available